

aspire for more...

Aspiria

CERAMIC

Decora Series

DIGITAL

Rustic Series

PORCELAIN

Glossy Series

TILES

Wood Series

600x600mm

600x1200mm

Punch Series





RL_HL_5001

WHITE BODY (GVT TILES)

600x600mm

DK




HL_1



HL_2



HL_3

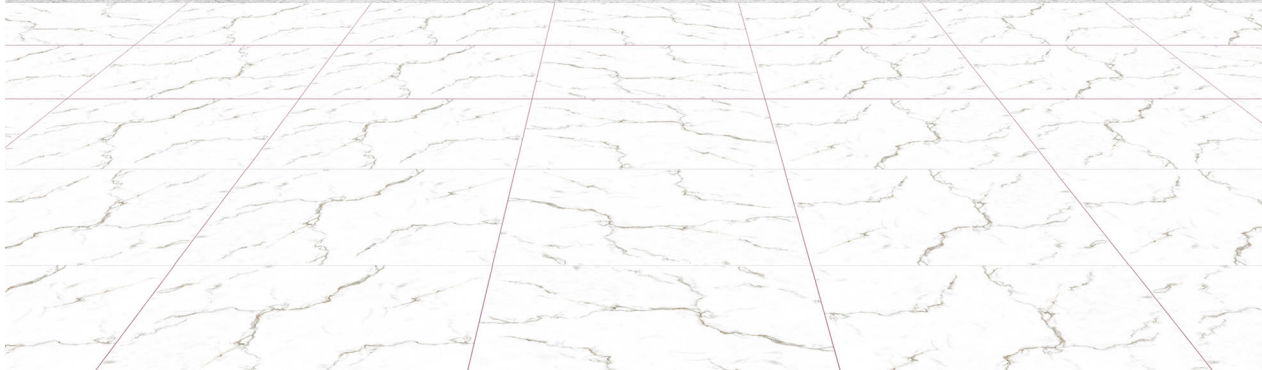


RL_HL_5002


WHITE BODY(GVT TILES)

600x600mm


LT

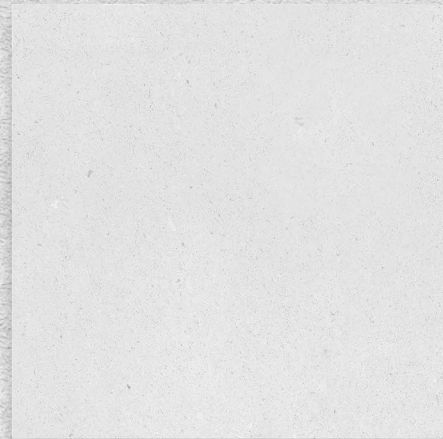



HL_1

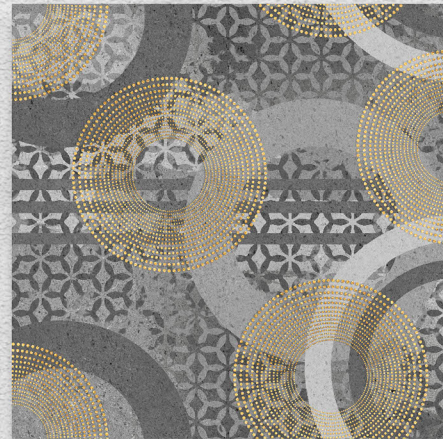

DK

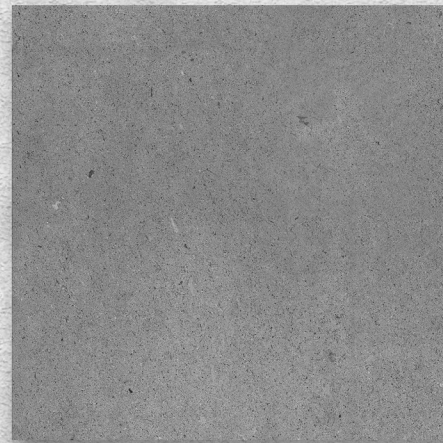

HL_2

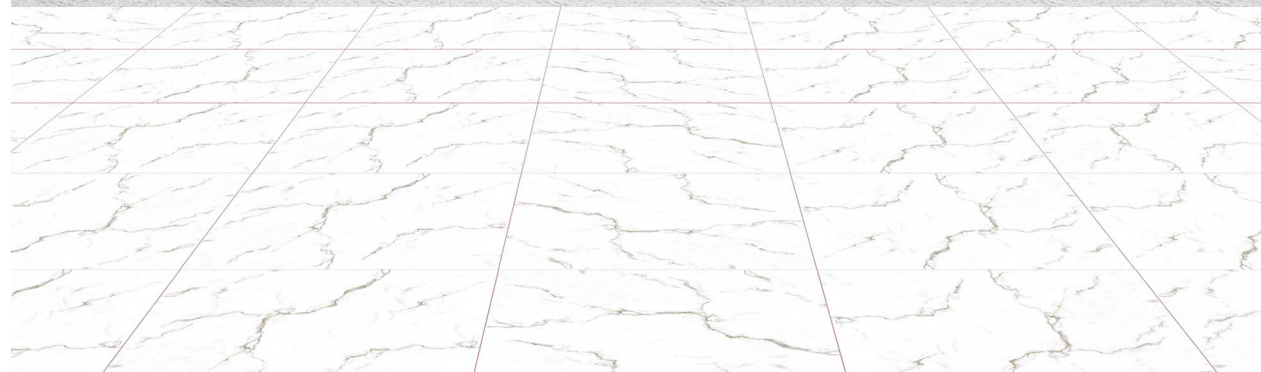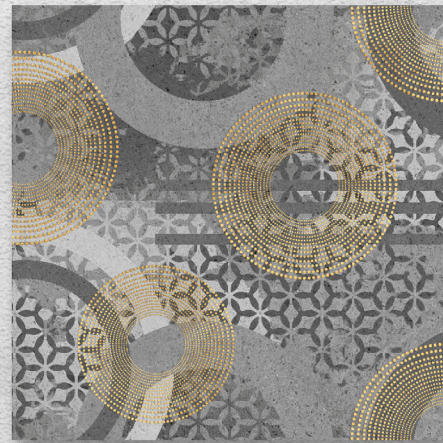

RL_HL_5003

WHITE BODY(GVT TILES)

600x600mm

LT



HL_1



DK



HL_2




RL_HL_5004

WHITE BODY(GVT TILES)

600x600mm


LT

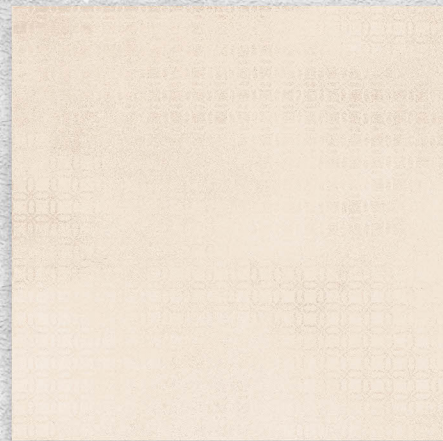

HL_1



DK

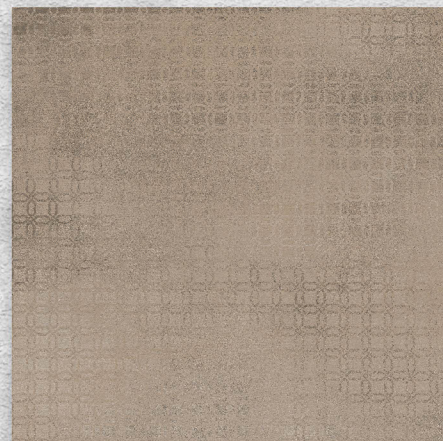

HL_2




RL_HL_5005


WHITE BODY(GVT TILES)

600x600mm

LT

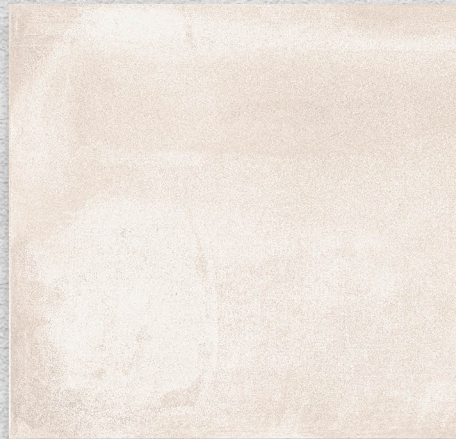


HL_1

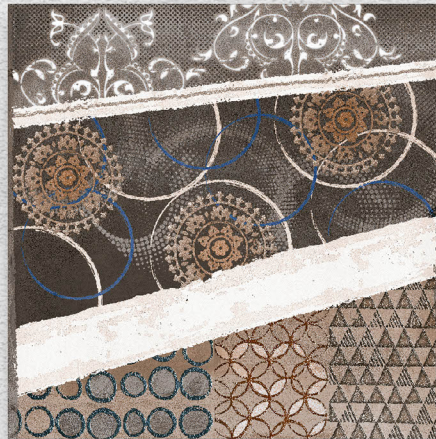

DK



HL_2

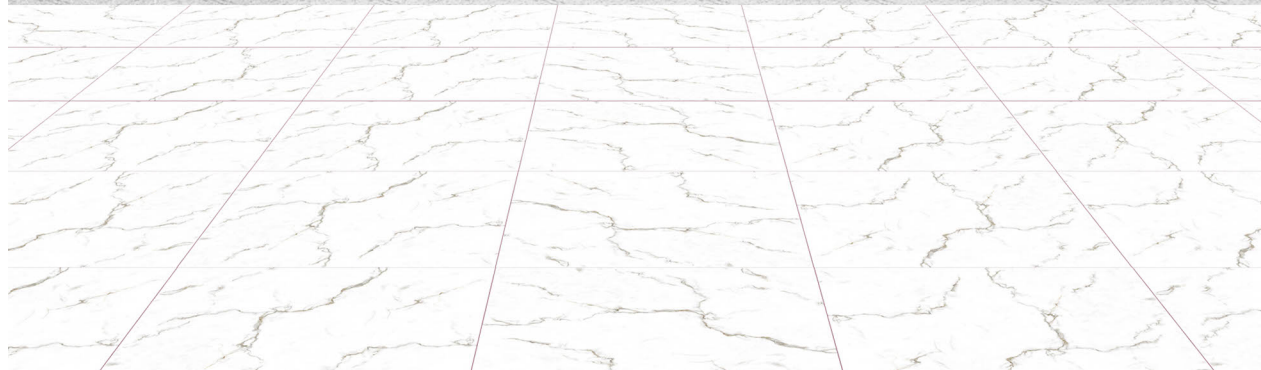

RL_HL_5006

WHITE BODY(GVT TILES)

600x600mm


DK



HL_1



HL_2

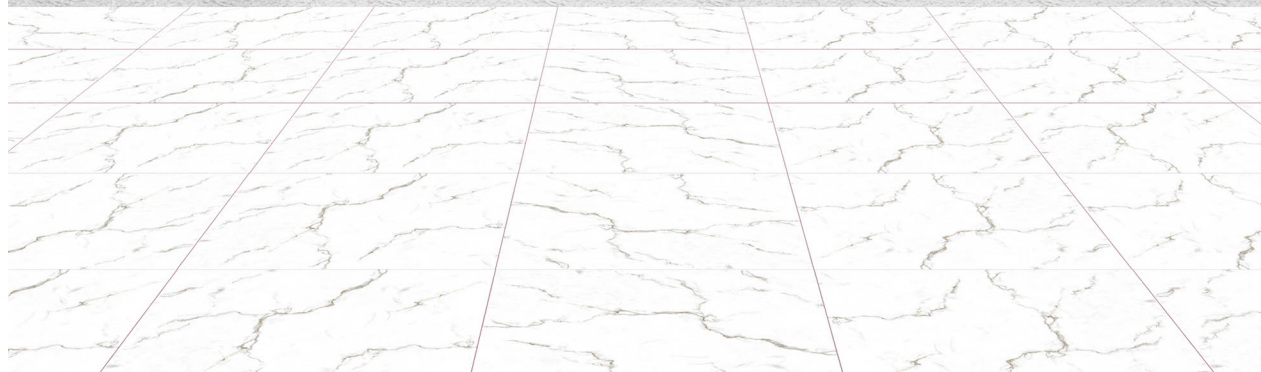

RL_HL_5007

WHITE BODY(GVT TILES)

600x600mm

LT




HL_1



DK



HL_2

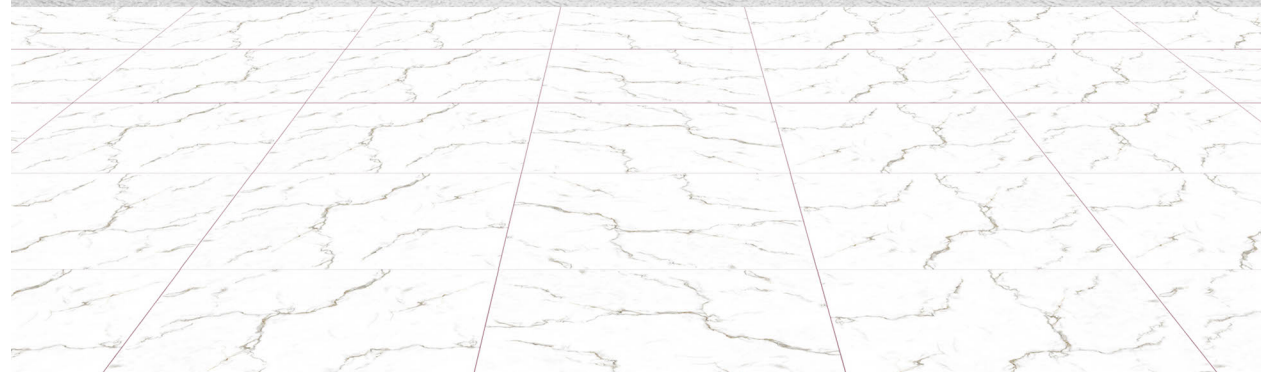


RL_HL_5008


WHITE BODY(GVT TILES)

600x600mm


LT

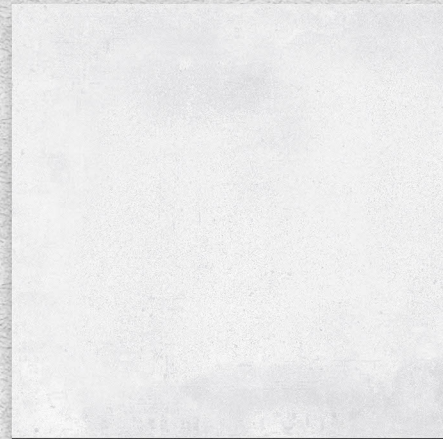

HL_1

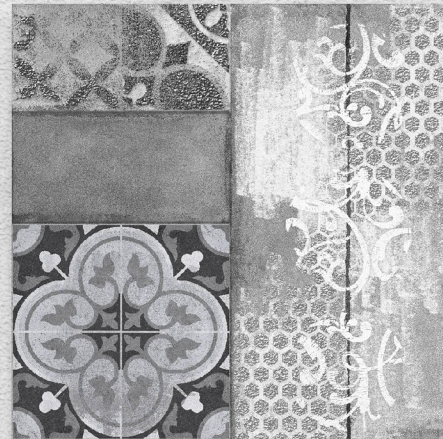

DK

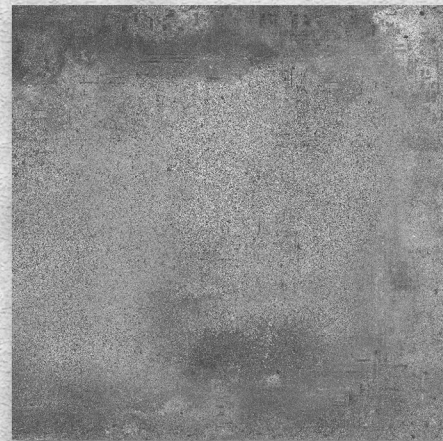

HL_2





RL_HL_5009




WHITE BODY(GVT TILES)

600x600mm

DK

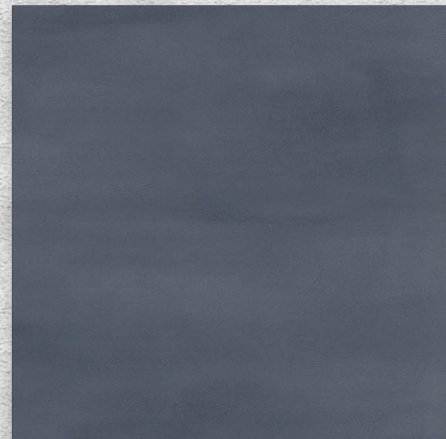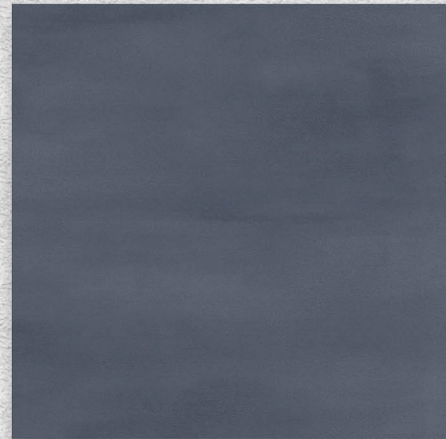

HL_1

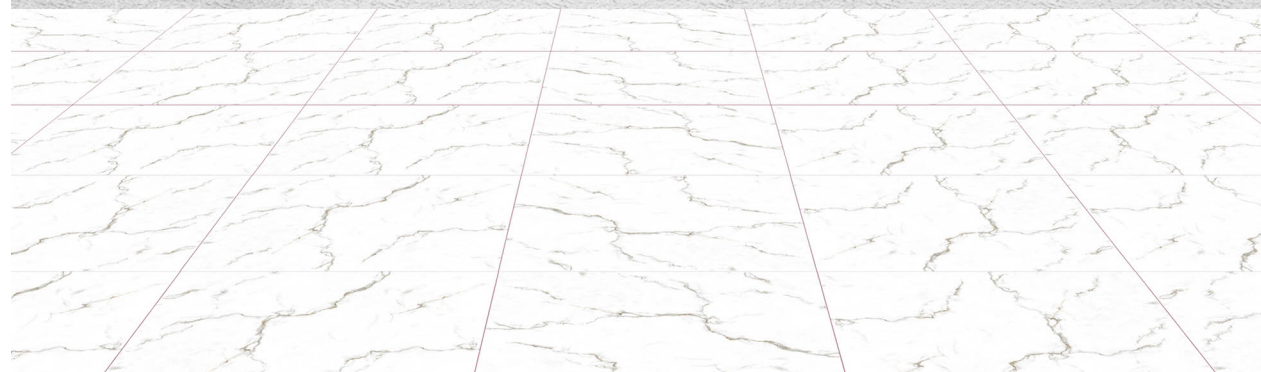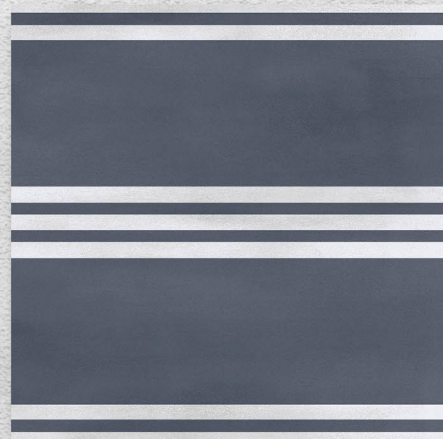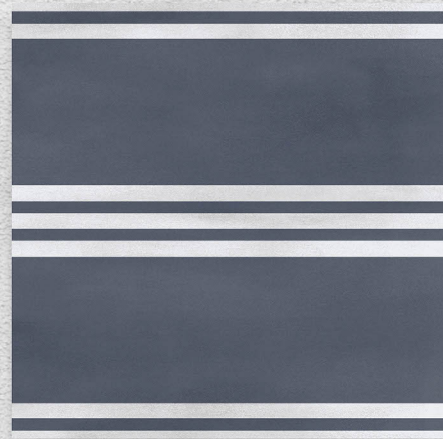



RL_HL_5010


WHITE BODY (GVT TILES)

600x 600mm


DK





HL_1

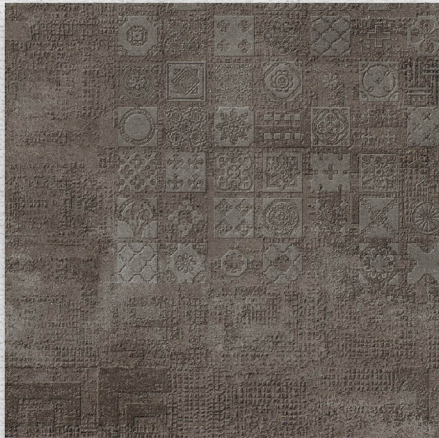

HL_2

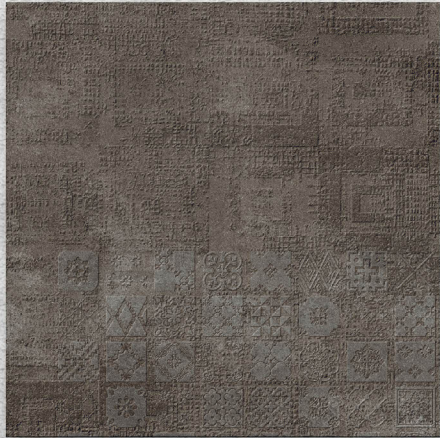

HL_3

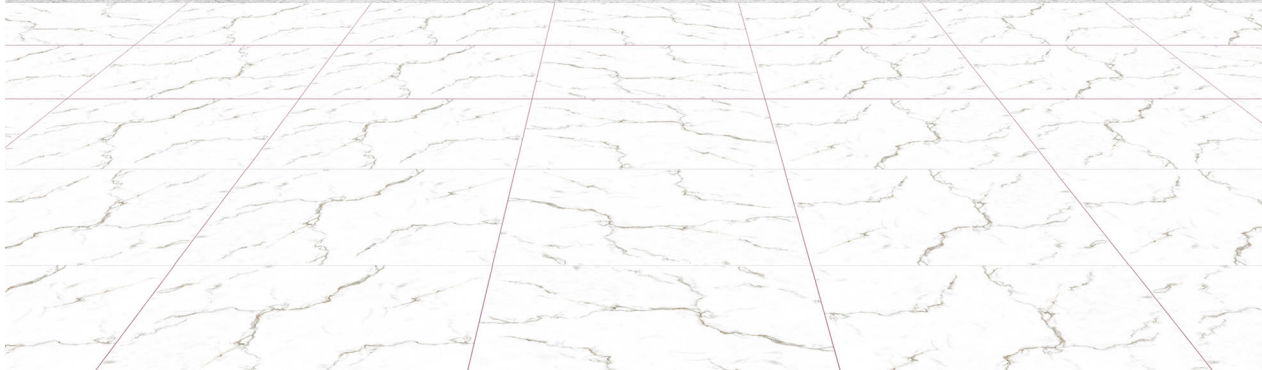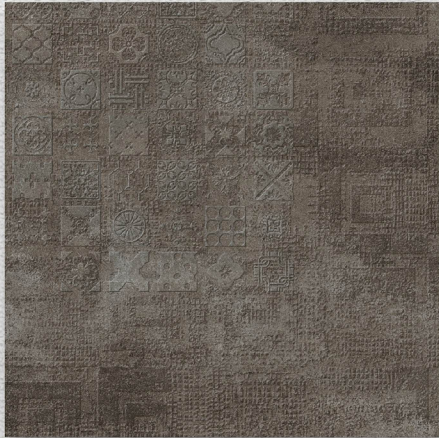

RL_HL_5011

WHITE BODY(GVT TILES)

600x600mm

LT




HL_1



HL_2



HL_3


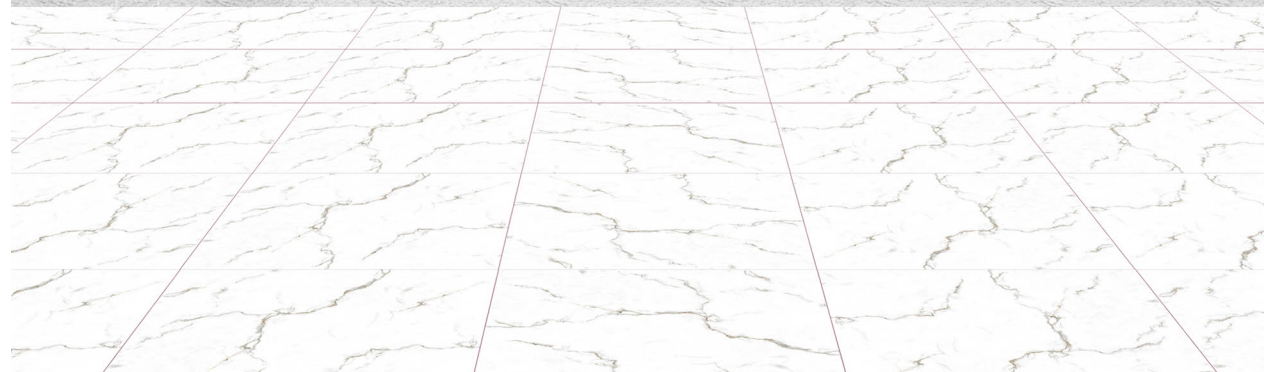


RL_HL_5012

WHITE BODY(GVT TILES)

600x600mm

HL

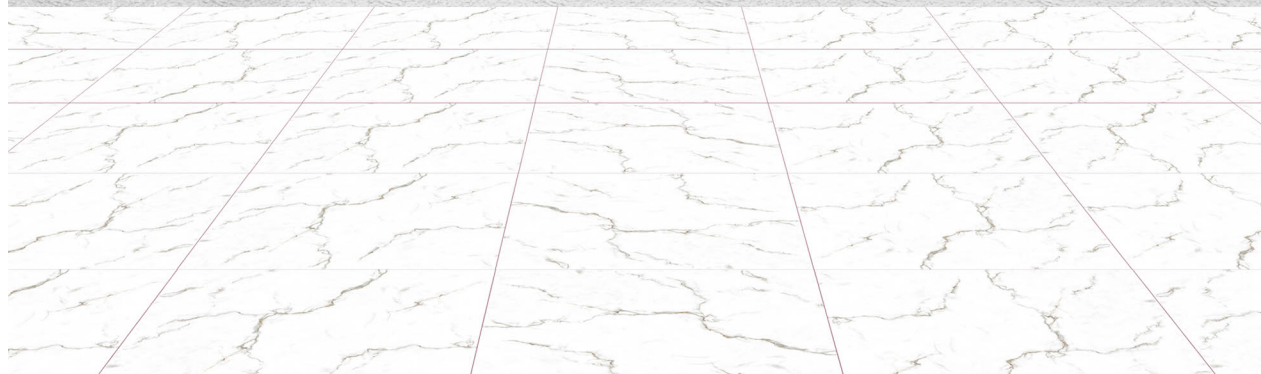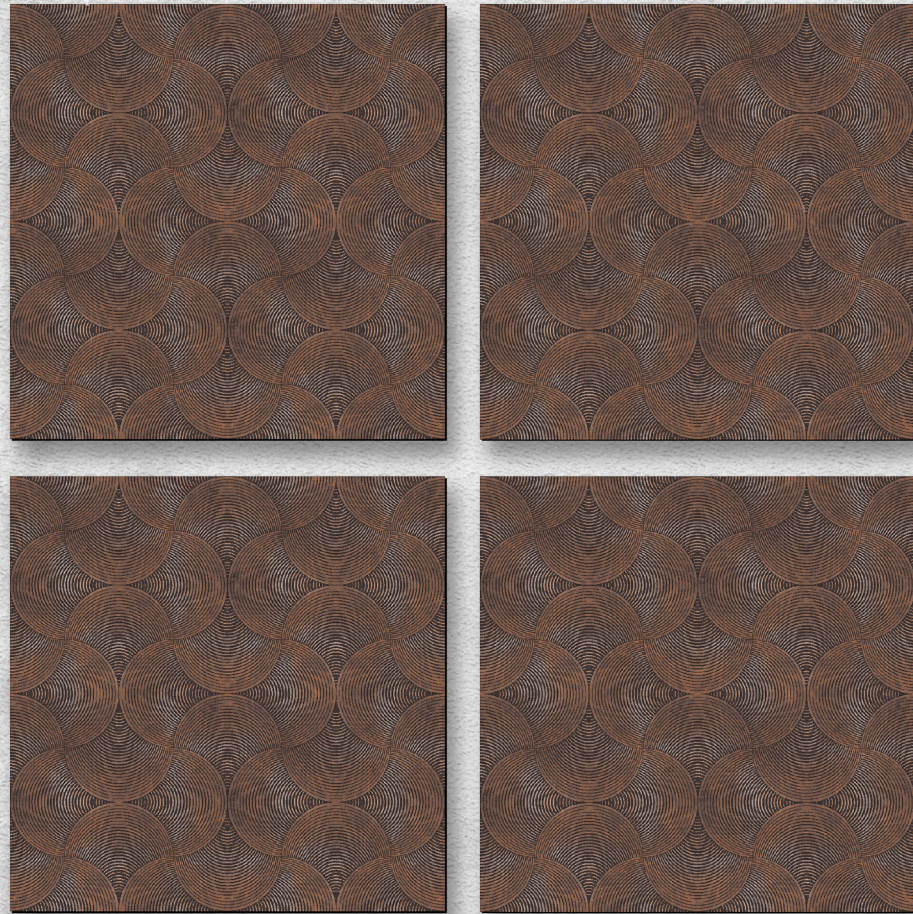

RL_HL_5013

WHITE BODY(GVT TILES)

600x600mm

HL





Particulars	Standard as per ISO 13006/EN 176	OUR VALUE	METHOD OF TESTING
Deviation in length	± 0.50%	± 0.3%	EN 98
Deviation in Thickness	± 5%	±3%	EN 98
Straightness Of Sides	± 0.5%	± 0.3%	EN 98
Rectangularity	± 0.6%	± 0.3%	EN 98
Surface Flatness	± 0.5%	± 0.3%	EN 98
Water Absorption	< 3	3 < 4	ISO 10945.3 EN 98
Mohs Hardness	> 5	> 5	EN 101
Flexural Strength	> 35 N/Sq.mm	> 39 N/Sq.mm	—
Abrasion Resistance	As specified by Manufacturer	PE 3	ISO 10545.6 EN 102
Frost Resistance	Frost Proof	Frost Proof	ISO 10534 - 11
Chemical Resistance	No Damage	No Damage	ISO 10534 - 18
Thermal Shock Resistance	No Damage	No Damage	ISO 10545- 9
Colour Resistance	No Damage	No Damage	—
Stain Resistance	Resistance	Stain Proof	ISO 10545 - 14
Moisture Expansion	Nill	Nill	ISO 10545 - 10
Crazing Resistance	Min 2 Cycle	Min 4 Cycle	—

Note :
Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase and laying as the company dose not accept responsibility once the tiles are laid.

PACKING DETAIL				
Size	Thickness	No.OF Tiles	Area Approx.	Weight Approx.
600x600 mm	9 mm	4 Pcs.	1.44 Sq. Mtr.	28kg.



Airport



Shopping Center



Industries



Hospital



Schools



Hotel



Domestic



Offices



Super Markets



Restaurant – Cafee



Gym



Discotheques



Corridors



Religious Places



THANK YOU