

aspire for more...

**Aspiria**

**CERAMIC**

Decora Series

DIGITAL

Rustic Series

PORCELAIN

Glossy Series

TILES

Wood Series


600x600mm

600x1200mm

Punch Series





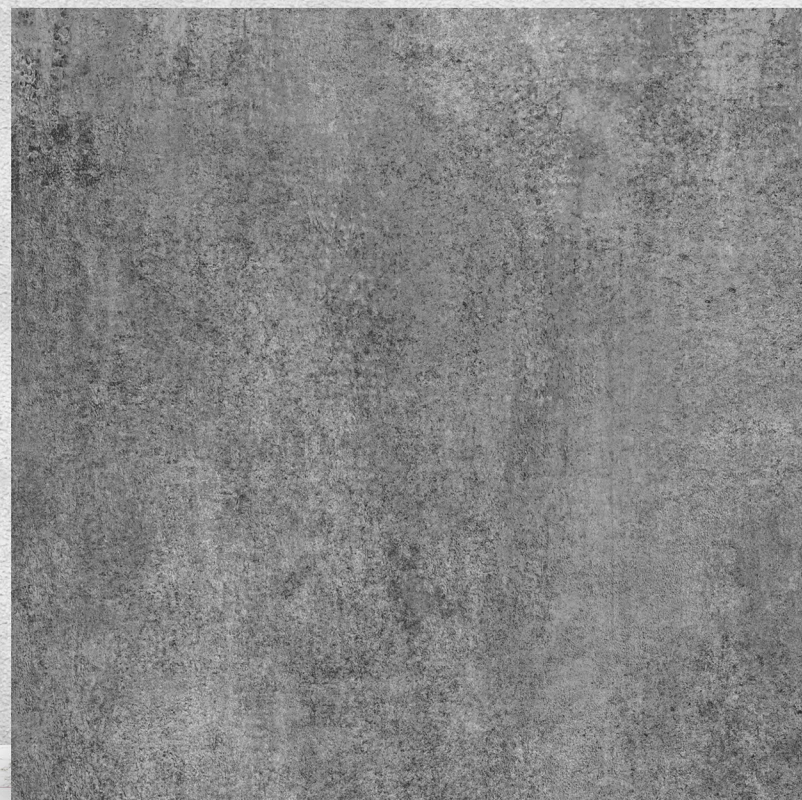



**RL\_GVT\_8002**

**WHITE BODY**<sub>(GVT TILES)</sub>

**600x600mm**





**RL\_GVT\_8003**

**WHITE BODY**<sub>(GVT TILES)</sub>

**600x600mm**





RL\_GVT\_8004

**WHITE BODY**(GVT TILES)

600x600mm





**RL\_GVT\_8005**

**WHITE BODY**<sub>(GVT TILES)</sub>

**600x600mm**









**RL\_GVT\_8007**

**WHITE BODY**(GVT TILES)

**600x600mm**





**RL\_GVT\_8008**

**WHITE BODY**<sub>(GVT TILES)</sub>

**600x600mm**






**RL\_GVT\_8009**

**WHITE BODY**<sub>(GVT TILES)</sub>

**600x600mm**

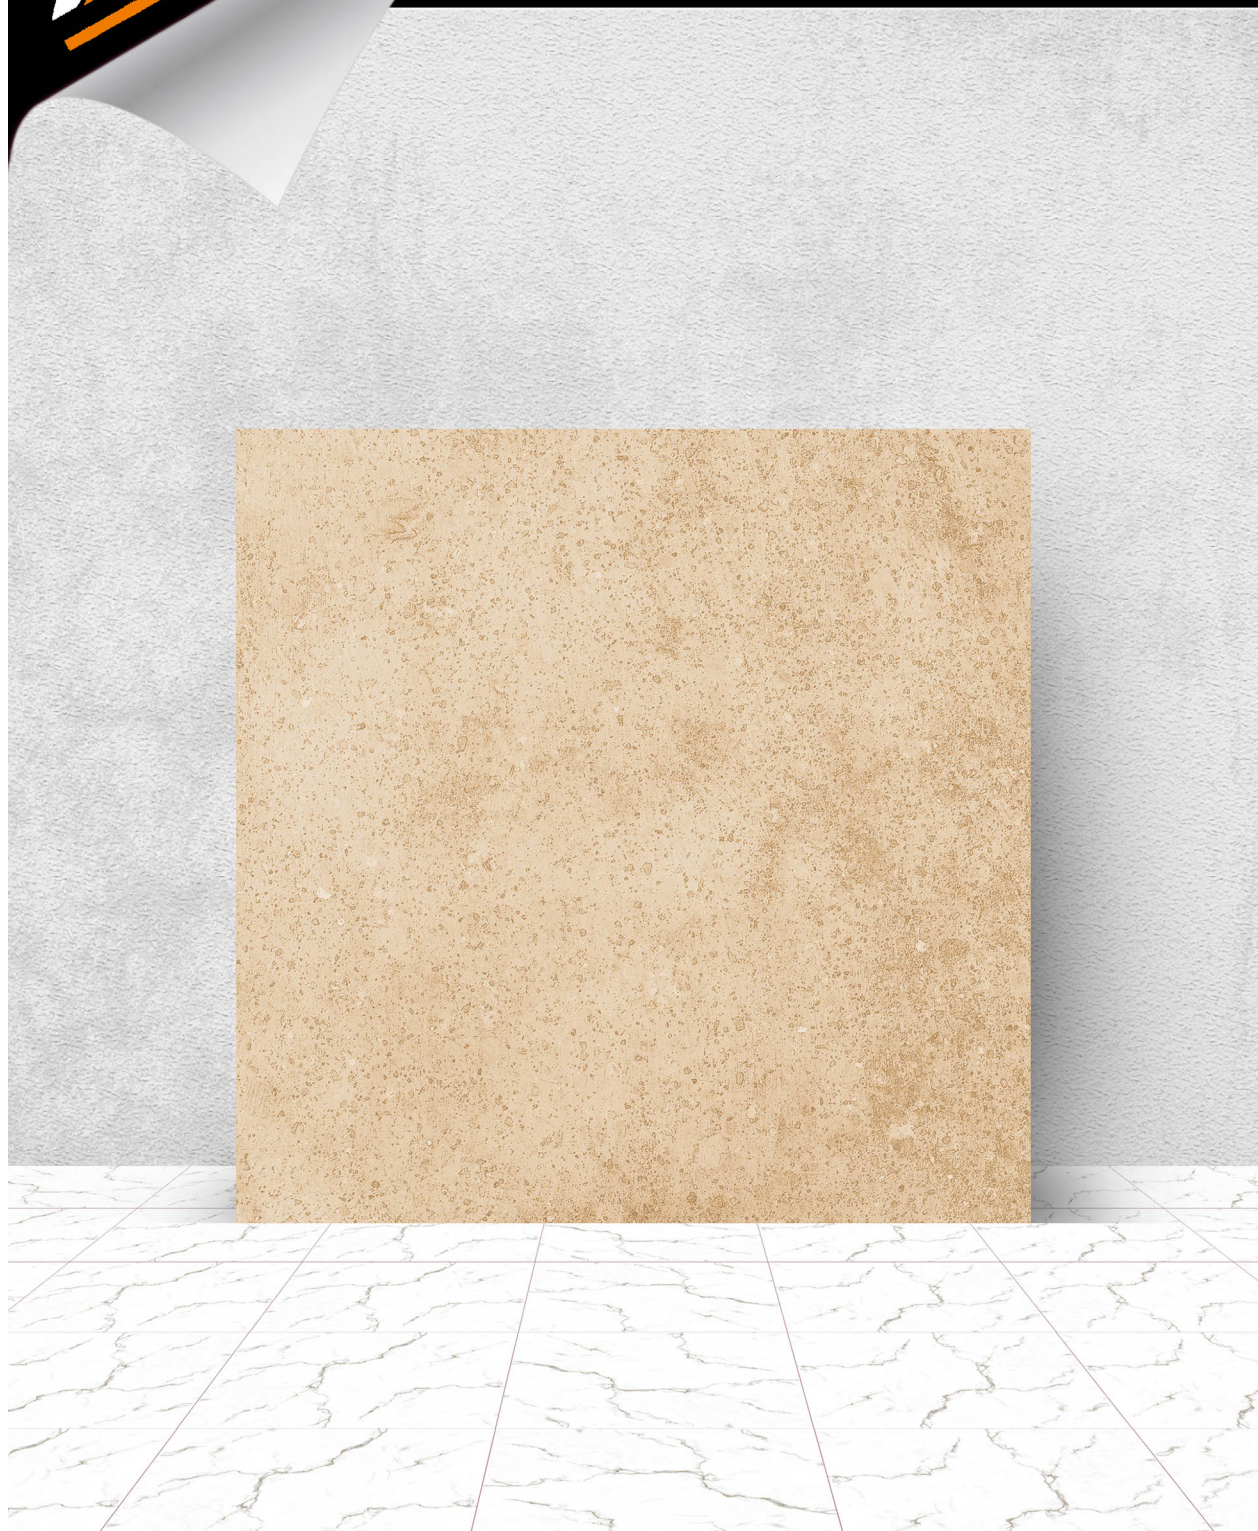



RL\_GVT\_7010

**WHITE BODY**(GVT TILES)

**600x600mm**





RL\_GVT\_7011

**WHITE BODY**(GVT TILES)

**600x600mm**





RL\_GVT\_7012

**WHITE BODY**(GVT TILES)

**600x600mm**





RL\_GVT\_7013

**WHITE BODY**(GVT TILES)

**600x600mm**






**RL\_GVT\_7014**

**WHITE BODY**(GVT TILES)

**600x600mm**

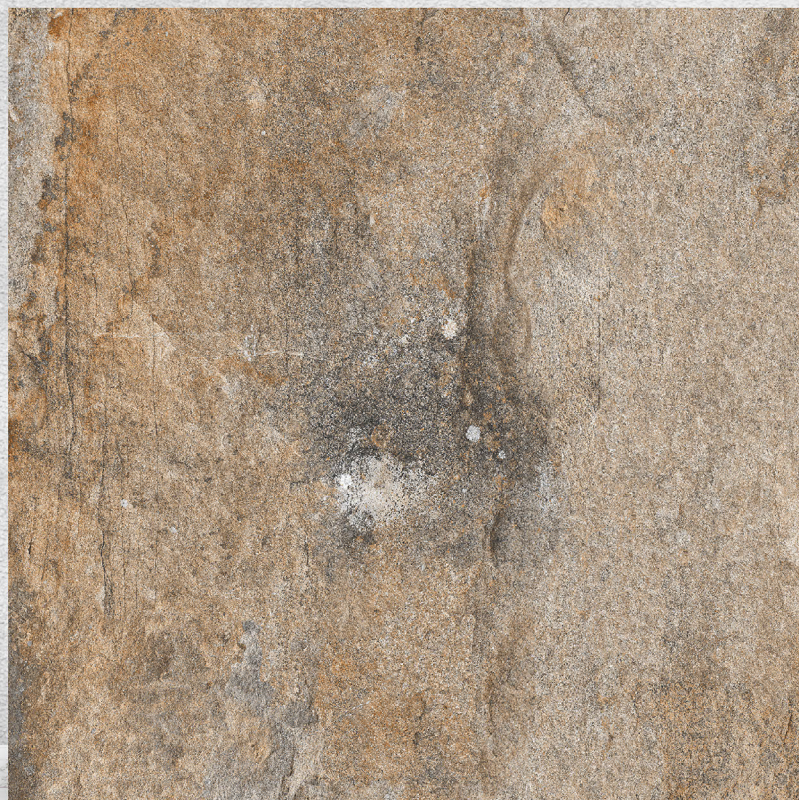




**RL\_GVT\_7015**

**WHITE BODY**(GVT TILES)

**600x600mm**

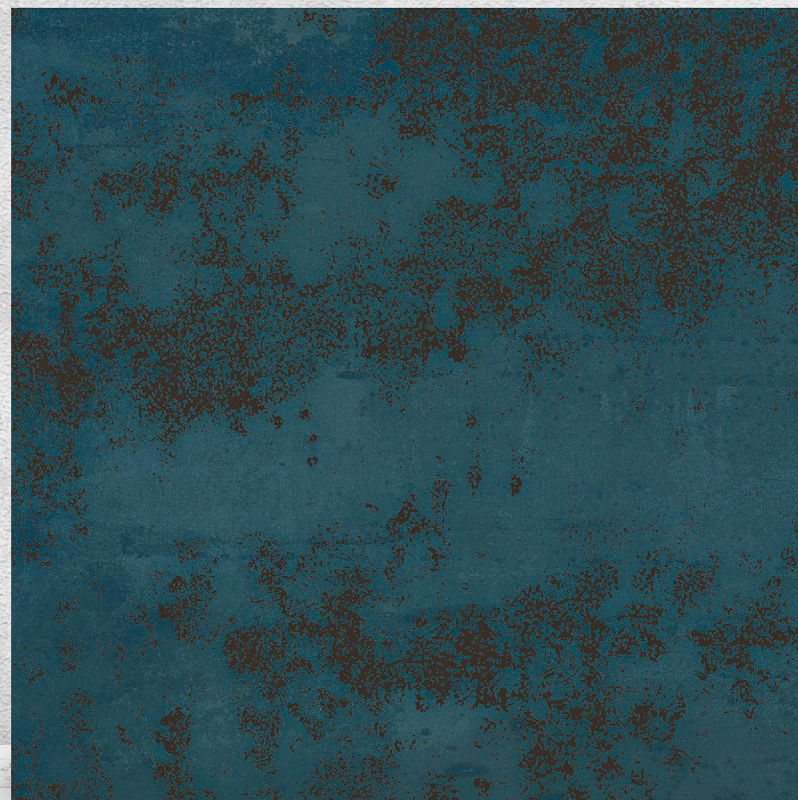





| Particulars              | Standard as per ISO 13006/EN 176 | OUR VALUE    | METHOD OF TESTING  |
|--------------------------|----------------------------------|--------------|--------------------|
| Deviation in length      | ± 0.50%                          | ± 0.3%       | EN 98              |
| Deviation in Thickness   | ± 5%                             | ±3%          | EN 98              |
| Straightness Of Sides    | ± 0.5%                           | ± 0.3%       | EN 98              |
| Rectangularity           | ± 0.6%                           | ± 0.3%       | EN 98              |
| Surface Flatness         | ± 0.5%                           | ± 0.3%       | EN 98              |
| Water Absorption         | < 3                              | 3 < 4        | ISO 10945.3 EN 98  |
| Mohs Hardness            | > 5                              | > 5          | EN 101             |
| Flexural Strength        | > 35 N/Sq.mm                     | > 39 N/Sq.mm | —                  |
| Abrasion Resistance      | As specified by Manufacturer     | PE   3       | ISO 10545.6 EN 102 |
| Frost Resistance         | Frost Proof                      | Frost Proof  | ISO 10534 - 11     |
| Chemical Resistance      | No Damage                        | No Damage    | ISO 10534 - 18     |
| Thermal Shock Resistance | No Damage                        | No Damage    | ISO 10545- 9       |
| Colour Resistance        | No Damage                        | No Damage    | —                  |
| Stain Resistance         | Resistance                       | Stain Proof  | ISO 10545 - 14     |
| Moisture Expansion       | Nill                             | Nill         | ISO 10545 - 10     |
| Crazing Resistance       | Min 2 Cycle                      | Min 4 Cycle  | —                  |

**Note** :  
Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase and laying as the company dose not accept responsibility once the tiles are laid.

| PACKING DETAIL |           |             |               |                |
|----------------|-----------|-------------|---------------|----------------|
| Size           | Thickness | No.OF Tiles | Area Approx.  | Weight Approx. |
| 600x600 mm     | 9 mm      | 4 Pcs.      | 1.44 Sq. Mtr. | 28kg.          |



Airport



Shopping Center



Industries



Hospital



Schools



Hotel



Domestic



Offices



Super Markets



Restaurant – Cafee



Gym



Discotheques



Corridors



Religious Places





THANK YOU